TECHNICAL INFORMATION



SUBMINIATURE PENTODE

TYPE

CK5672

.285" max.

The CK5672 is a filament type pentode of subminiature construction designed for use as a power amplifier in wearable and portable equipment. The flexible terminal leads may be soldered or welded directly to the terminals of circuit components without the use of sockets. Standard inline subminiature sockets may be used by cutting the leads to a suitable length.

MECHANICAL DATA

ENVELOPE: T-2X3 Glass

BASE: None (0.016" tinned flexible leads. Length: 1.5" min. Spacing: 0.048" center-to-center)

TERMINAL CONNECTIONS:

Lead 1 Plate Lead 2 Grid #2 Lead 3 Filament, positive

Lead 4 Grid #1 Lead 5 Filament, negative:

Grid #3

MOUNTING POSITION: Any

ELECTRICAL DATA


DIRECT INTERELECTRODE CAPACITANCES: (µµtds) A		
Grid #1 to Plate Input Output	0.14 2.8 3.5	
RATINGS - ABSOLUTE MAXIMUM VALUES:		
Filament Voltage (dc) Plate Voltage Grid #2 Voltage Total Cathode Current	100	volts volts volts ma.
CHARACTERISTICS AND TYPICAL OPERATION:		
Filament Voltage (dc) Filament Current Plate Voltage Grid #2 Voltage Grid #1 Voltage Plate Current Grid #2 Current Transconductance Plate Resistance Load Resistance Distortion (approx.) Power Output Peak AF Signal Voltage	50 67.5 67.5 - 6.5 3.25 0.95 650 125 20 10	volts volts volts ma. ma. µmhos kilohms

▲ Without shield.


385' max. Red Dot

Tentative Data



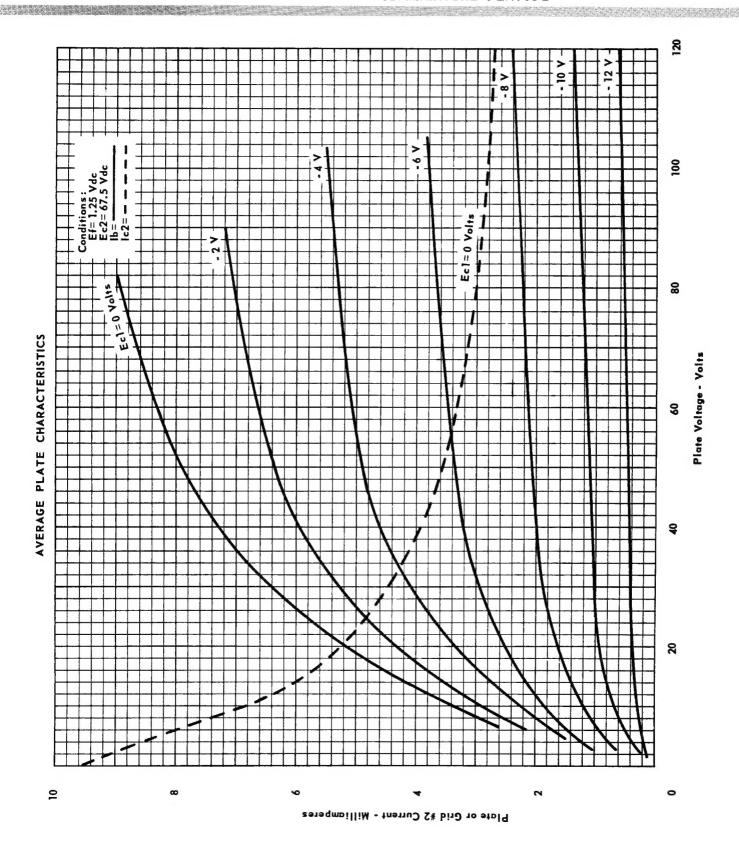




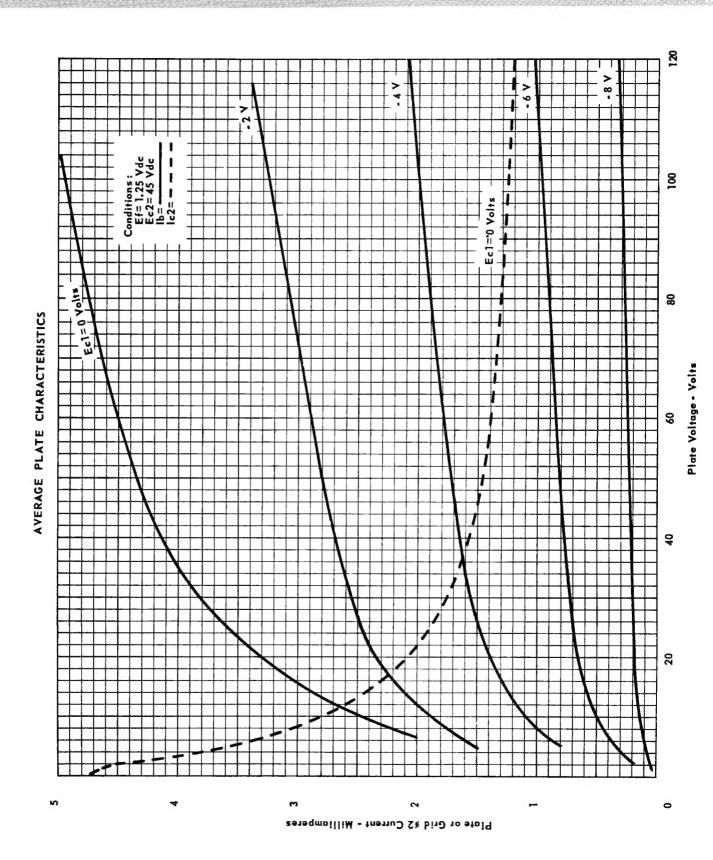


Printed in U.S.A.



AVERAGE PLATE CHARACTERISTICS (Triode Connected)

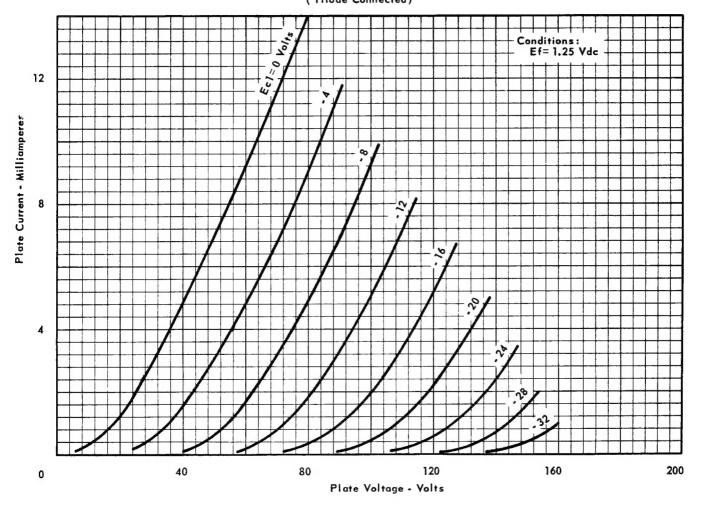



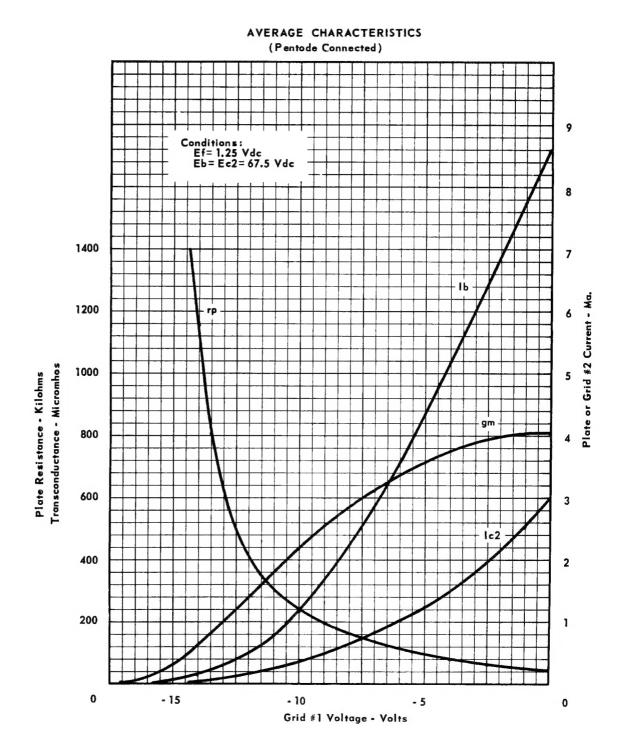

Printed in U.S.A.

- CA



SUBMINIATURE PENTODE

